


ESDAN ESY[®] SAFETY YELLOW PREMIUM INDUSTRIAL AIR & WATER HOSE

Esdan ESY is a general purpose hose suitable for industrial air and water applications. ESYs yellow ribbed cover and strong heavy duty construction gives this hose excellent abrasion and kink resistance maintaining good flexibility and weathering properties ESY has been designed to perform in the tough Australian industrial environment and accordingly it exceeds all the requirements of **AS 2554 Class B**

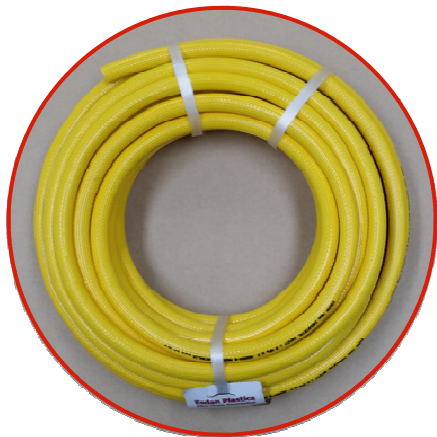

- All Australian made
- Tough ribbed cover for abrasion resistance
- Bright Yellow cover for industrial safety
- Oil resistant inner tube.
- Ozone resistant outer for long service life
- Conforms to AS2554 Class B standard
- Temperature range: -0°C to +50°C
- Minimum safety factor of 4:1 allowing for pressure surges & variation in temperature
- Fully reinforced with high tensile polyester

PRODUCT CODE	I.D mm	O.D mm	WORKING PRESSURE @23°C	MIN. BURST PRESSURE @23°C	COIL LENGTH	REEL LENGTH
19-06YL****	6mm	12mm	232 PSI	6.4 MPa	20m/100m	300m
19-08YL****	8mm	14mm	232 PSI	6.4 MPa	20m/100m	300m
19-10YL****	10mm	16.4mm	232 PSI	6.4 MPa	20m/100m	300m
19-12YL****	12.5mm	18.9mm	232 PSI	6.4 MPa	20m/100m	300m
19-20YL****	20mm	27.6mm	232 PSI	6.4 MPa	20m/100m	MTO
19-25YL****	25mm	34.2mm	232 PSI	6.4 MPa	20m/100m	MTO
19-32YL****	32mm	41.8mm	232 PSI	6.4 MPa	20m/60m	n/a
19-40YL****	40mm	52.4mm	232 PSI	6.4 MPa	20m/40m	n/a
19-50YL****	50mm	62mm	232 PSI	6.4 MPa	20m/40m	n/a

Esdan Plastics Pty. Ltd.
525—527 Hammond Road
Dandenong South
Victoria 3175 Australia

Disclaimer

While every reasonable care has been taken in preparation of this brochure, Esdan Plastics does not warrant that the information contained herein is without errors or omissions or suitable for your specific purpose. These specifications are to be used as a guide only, and are subject to change without notification. All safety factors are 4:1 unless stated otherwise. All information contained herein is subject to copyright and cannot be used without prior consent by ESDAN PLASTICS Pty. Ltd.